


Series GMPI

Motor type 404 465

Design Data	
Commutation	Brushed
Direction of rotation	Bi-directional
Bearing type	A:Sleeve - B:Sleeve

0231 A

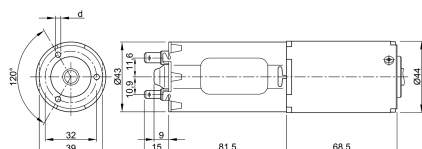



Performance data		
Rated voltage [V]	U_N	24
Nominal torque [Nm]	M_N	4.00
No-load speed [min^{-1}]	n_0	210.0
Nominal power [W]	P_N	72.0
Nominal current [A]	I_N	7.0
Nominal force [kN]	F_N	0.00
Duty cycle	s3	

Sensor data	
Pulses	0
Output channels	0

Other data	
Gear ratio	39.7/1
Gear wheel material	plastic
Suppression components	7,5 μ H, 1nF
Enclosure class	IP30
Weight [kg]	0.630


Remarks: d = 3,3mm, for selftapping screw 4mm (shape Remform)

Motor picture

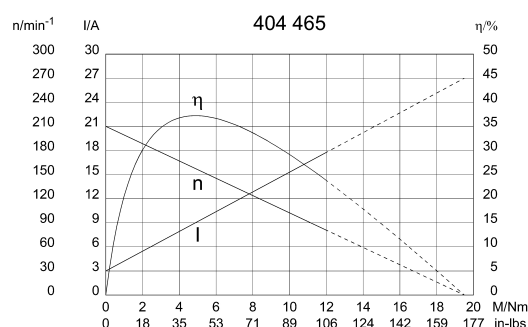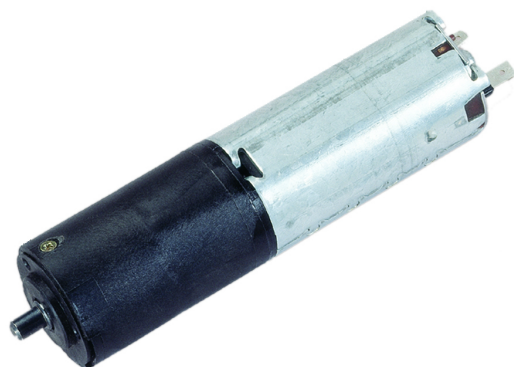


Output shaft drawing (W), Wiring diagrams (S) and Connector layout (K)


W 268



S 30



K 117



I Blade terminal ends 4,8 x 0,8 DIN 46 244
 II Blade terminal ends 6,3 x 0,8 DIN 46 244